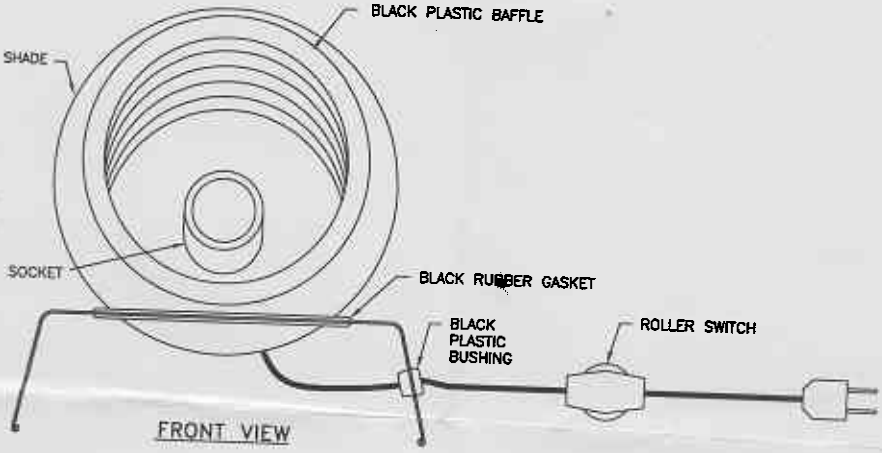

FRONT VIEW

MODEL: 20506

INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

UNPACK THE LAMP: TO PROTECT THE FINISH, PLACE THE LAMP ON A SMOOTH SURFACE.

ASSEMBLE THE LAMP

1. CAREFULLY UNPACK LAMP AND SET ON A CLEAN SURFACE.
2. INSTALL 50 WATT R20 BULB (NOT INCLUDED) INTO SOCKET.
3. PLUG POWER SUPPLY CORD INTO POWER OUTLET AND TURN LAMP ON AT SWITCH ON CORD.

BULB REPLACEMENT

1. BEFORE REPLACING THE BULB, BE SURE THAT THE SHADE AND BULB ARE COOL AND LAMP IS UNPLUGGED.
2. UNSCREW EXISTING BULB FROM SOCKET AND REPLACE WITH A NEW BULB. PLUG POWER SUPPLY CORD BACK INTO OUTLET.

TROUBLE SHOOTING

1. IF YOUR LAMP DOES NOT LIGHT, CHECK PLUG AT THE WALL. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.
2. IF LAMP STILL DOES NOT LIGHT, UNPLUG FROM OUTLET. CHECK THE BULB FOR A BROKEN FILAMENT. REPLACE BULB IF NECESSARY, PLUG IN LAMP AND TURN IT ON.
3. IF THE LAMP STILL DOES NOT LIGHT, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.